



installation guide
**DOOR
RESTRICTOR**

New to the range is our door restrictor, in stock now. This prevents the door from opening more than 90 degrees, if it was to get caught in the wind for example. The arm can also be easily detached to allow full opening of the door.

The restrictor is easy to install and can be retrofitted on site. Please see instructions below and overleaf.

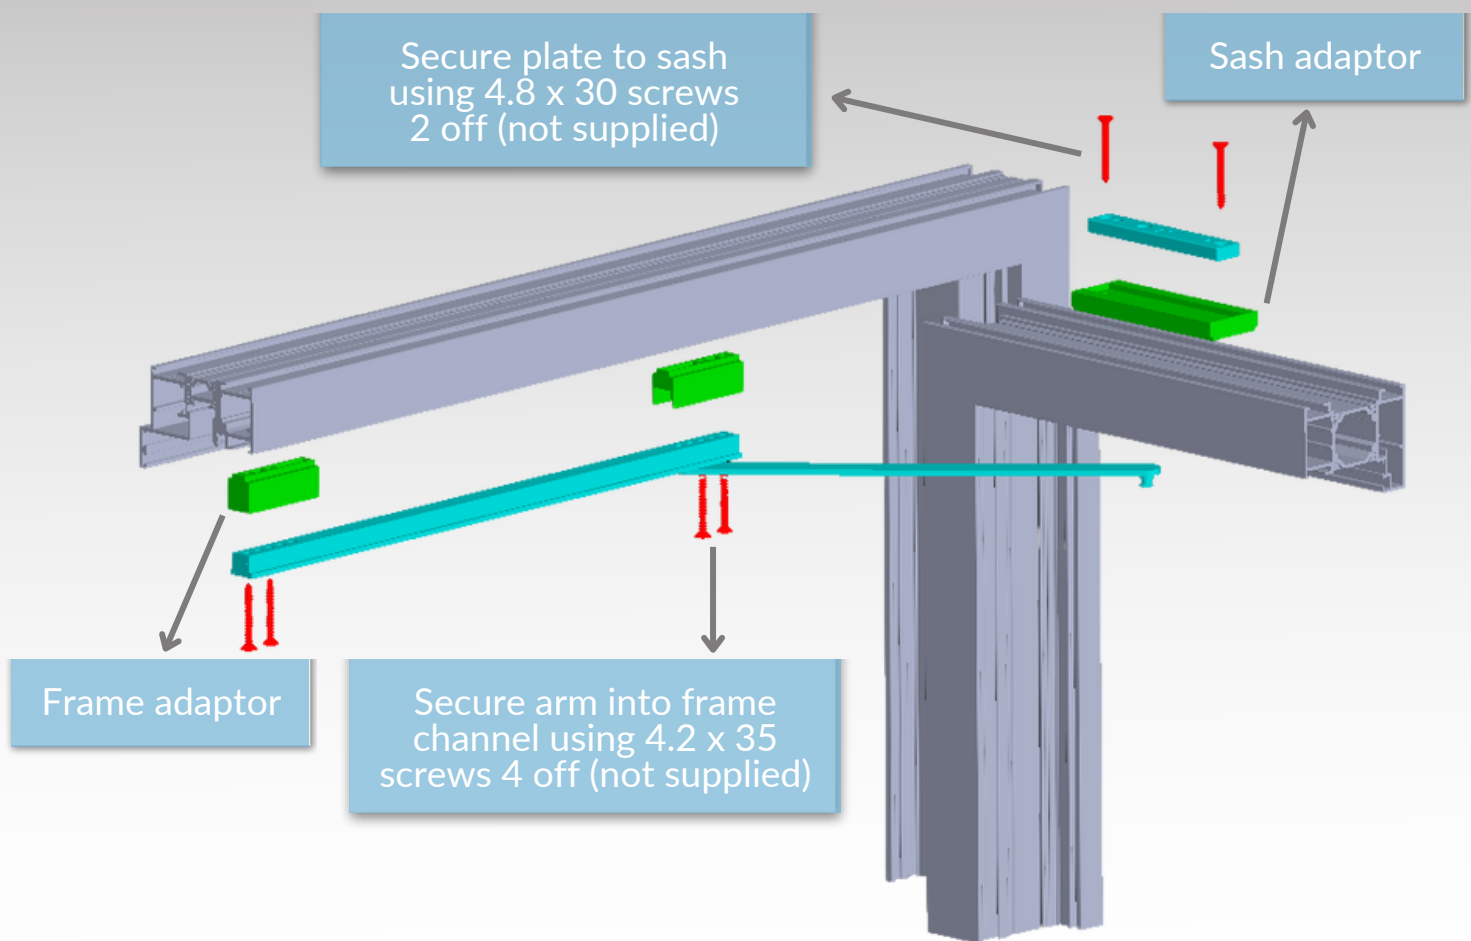


Sash fixing

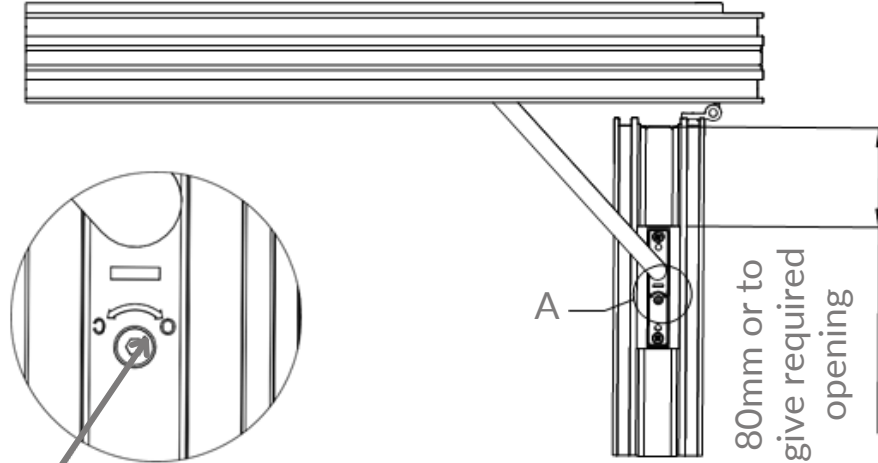

Detail A

Use 2.5mm allen key to set tension fully to "O" this will enable easier disengagement of friction arm if needed

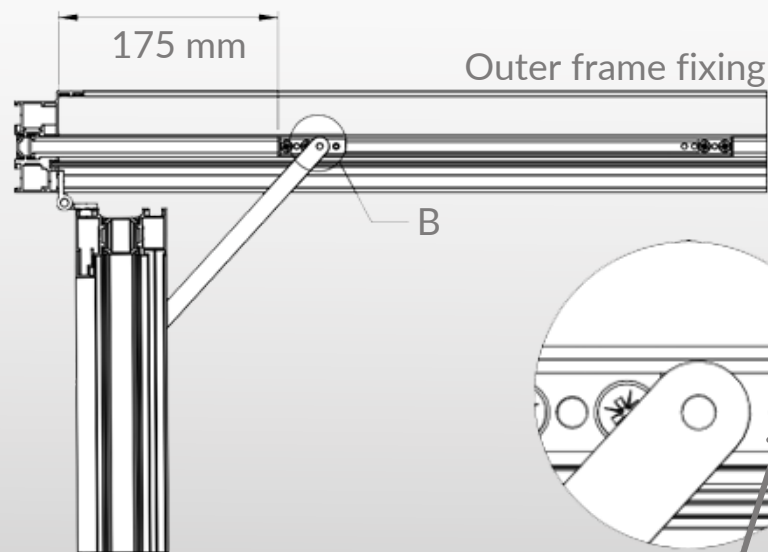

Outer frame fixing

Detail B

Adjust friction using 2.5mm allen key do not over-tighten)

 **ALUNET**
SYSTEMS

installation guide
**DOOR
RESTRICTOR**