



PAGE	OF	QUOTE	ORDER
Company Name:		Company Ref.	
Company Telephone:		Company Email:	
Date Ordered:		Delivery Date Required:	

Style 1 ☐		Style 2 ☐		Style 3 ☐	
Style 4* ☐		Style 5* ☐			
Style 6 ☐		Style 7 ☐			
Style 8 ☐		Style 9* ☐			
Style 10* ☐		Style 11 ☐			
Style 12* ☐		Style 13* ☐			

Overall Dimensions			
Width (mm)		Height (mm)	

Colour (Matt Finish)	External	Internal
Pure White 9010	☐	☐
Anthracite Grey 7016	☐	☐
Jet Black 9005	☐	☐
Bespoke RAL [±] Please specify RAL code in NOTES section	☐	☐

Glazing 28mm	1.2 U-Value	1.0 U-Value
Active Aqua	☐	☐
Active Blue	☐	☐
Active Bronze	☐	☐
Active Clear	☐	☐
Active Neutral	☐	☐
Unglazed	☐	☐


Electric SheerVent Quantity [^]				Electric SheerVent Options	
1	☐	3	☐	Remote Control	☐
2	☐	4	☐	Wireless Rain Sensor	☐

NOTES

Min/Max Sizes	Width (mm)		Length (mm)	
	Min.	Max.	Min.	Max.
Lantern Style				
Style 1	600	2400	600	2400
Style 2	600	2400	800	3000
Style 3	600	2400	1200	4000
Style 4	600	2400	2400	6000
Style 5	600	2400	3000	6000
Style 6	1800	3200	1800	3200
Style 7	1800	3200	2000	3400
Style 8	1800	3200	2000	4000
Style 9	1800	3200	3000	6000
Style 10	1800	3200	3600	6000
Style 11	1400	3200	1600	4000
Style 12	1400	3200	2400	5000
Style 13	1400	3200	3400	6000

AT A GLANCE


- 25° Pitch
- 50mm Sightlines
Rafter, hip, jack rafters and ridge
- 1.2KN/m² Snowload
Covering the whole of the UK up to 200m altitude.
- SheerVent option with manual or intelligently automated opening



The lantern design assumes that the eaves beam is fully supported along all edges by a structural upstand capable of resisting the full vertical (as well as any lateral spread loads) applied by the lantern roof self-weight plus imposed snow/wind loads.

[±]Subject to minimum order qty. Price on application.

MINIMUM UPSTAND DIMENSIONS

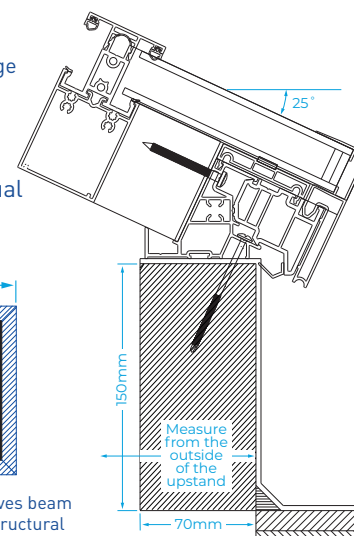

All styles come with equally spaced rafters as standard. *These styles can incorporate an optional SheerVent, please draw location of vent in any square section on style if required. No muntin bars available, vent replaces entire glass aperture. [^]Electric operation only (Manual operation not available).