

PAGE <input type="checkbox"/>	OF <input type="checkbox"/>	QUOTE <input type="checkbox"/>	ORDER <input type="checkbox"/>
Company Name:		Company Ref:	
Company Telephone:		Company Email:	
Date Ordered:		Delivery Date Required:	

Choose your Frame & Sash	Stepped Sash	Contemporary Sash
Standard Frame (64mm depth)	<input type="checkbox"/> Option 1	<input type="checkbox"/> Option 3
Flush Frame (72mm depth)	<input type="checkbox"/> Option 2	<input type="checkbox"/> Option 4

Traditional Colours	RAL	Ext.	Int.
Hipca Gloss White	9910G		
Anthracite Grey	7016M		
Jet Black	9005M		
Pure White	9010M		
Premium Colours	RAL	Ext.	Int.
Cream	9001M		
Agate Grey	7038M		
Squirrel Grey	7000M		
Pastel Turquoise	6034M		
Chocolate Brown	8017M		
Bespoke RAL Colour			

Glazed <input type="checkbox"/>	Unglazed <input type="checkbox"/>	Standard Beaded System <input type="checkbox"/>	Beadless Wraparound System <input type="checkbox"/>
---------------------------------	-----------------------------------	---	---

Bay Location	Bay Height	Bay Cill Type	Drainage		Trans/Mullions		Glass/Panel Type (Black Warm Edge Spacer Bar as Standard)	Outer Frame		Ventilation (Specify Size)	
			Con	Face	Split	Drop		Std. 35.5mm	Int. 48mm	Rebates (Sash/Frame)	45mm Extender

Additional Bay Information:	
Is this a bow bay conversion? Please note for bow bay conversions supply external brick to brick opening size for backline measurement and internal size for the projection.	<input type="checkbox"/>
Load Bearing Bay Jacks Required	<input type="checkbox"/>
Pole Type:	
Fixed Square Post 90°	<input type="checkbox"/>
Variable Angle Pole 100°-170°	<input type="checkbox"/>
Fixed Angle Post 135°	<input type="checkbox"/>
Fixed Angle Post 150°	<input type="checkbox"/>
No Poles, No deductions	<input type="checkbox"/>





SKETCH & NOTES - for frame designs and if required additional bay layout details

or see frame items ____ to ____ on attached window/door order form

NOTES

- All measurements are INTERNAL.
- Backline measurements taken from inside of end frames.
- Projection measurements from inside of front frame to backline.
- Any reverse angled bays, measure & state clearly in the SKETCH & NOTES section.

A	mm
B	mm
C	mm
D	mm
E	mm
F	mm
G	mm
H	mm
I	mm
J	mm
K	mm

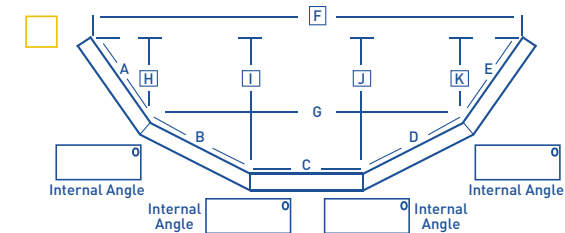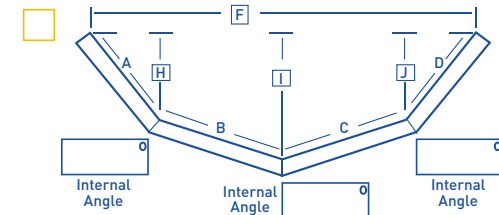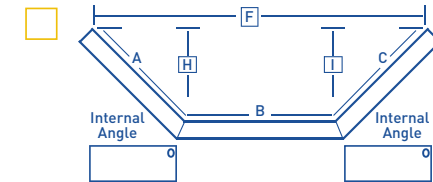

Standard Spec: 35.5mm frame, 28mm glazing, clip in beads internally and externally when beaded, white furniture, hidden drainage, black gasket, espag locking, security hinges, std transom drop 400mm

Key: D = Dummy F= Fire Hinge R= Restrictor hinge T = Toughened glass TV = Trickle vent L = Letter plate
NOTE: All sizes shown include cill and extensions - All viewed from outside. Sketch arrow points to hinge side.